



## RS-FIX-G

# Smoke curtain

The RS-FIX-G is a static smoke protection curtain made of glass with DH-30 classification. In the event of a fire, it limits and controls the spread of smoke and divides buildings into defined zones to prevent smoke from spreading into other areas.

### Typical applications

The RS-FIX-G is ideal for public areas where aesthetic requirements play a central role. The system has been tested and approved according to the European standard UNE EN 12101-1 and bears the CE marking.

### Material

Glass, specially processed for smoke protection applications

Glass properties

Thickness: 6 mm

Width and height tolerance:  $\pm 0.2$  mm

Impact resistance: 1(C)1 classification according to EN 12600

Specific weight: 15 kg/m<sup>2</sup>

Light transmission: 89%

**CE CERTIFIED**  
**EN 12101-1**

#### Austria

ATTRIA GmbH  
ATTRIA production GmbH

Gewerbepark Mitterfeld 7  
2523 Tattendorf  
AUSTRIA

+43 2254 73734  
[office@attria-group.com](mailto:office@attria-group.com)

#### Germany

ATTRIA GmbH

Am Dorfplatz 1  
86489 Deisenhausen  
GERMANY

+49 8282 6209180  
[office@attria-group.de](mailto:office@attria-group.de)

#### Southeast Europe


ATTRIA production GmbH

9th of September dist.  
Promishlena zona  
2227 Bojurishte  
BULGARIA

+359 878 550076  
[office.bg@attria-group.com](mailto:office.bg@attria-group.com)

Media Owner: ATTRIA GmbH / 2523 Tattendorf

© 2025 ATTRIA GmbH. All contents of this flyer, especially texts, photographs, and graphics, are protected by copyright. Unless explicitly stated otherwise, the copyright is held by ATTRIA GmbH. Subject to change and errors. Illustrations may vary; the actual delivered products may differ in shape and color. The technical data provided is not intended as a basis for planning.

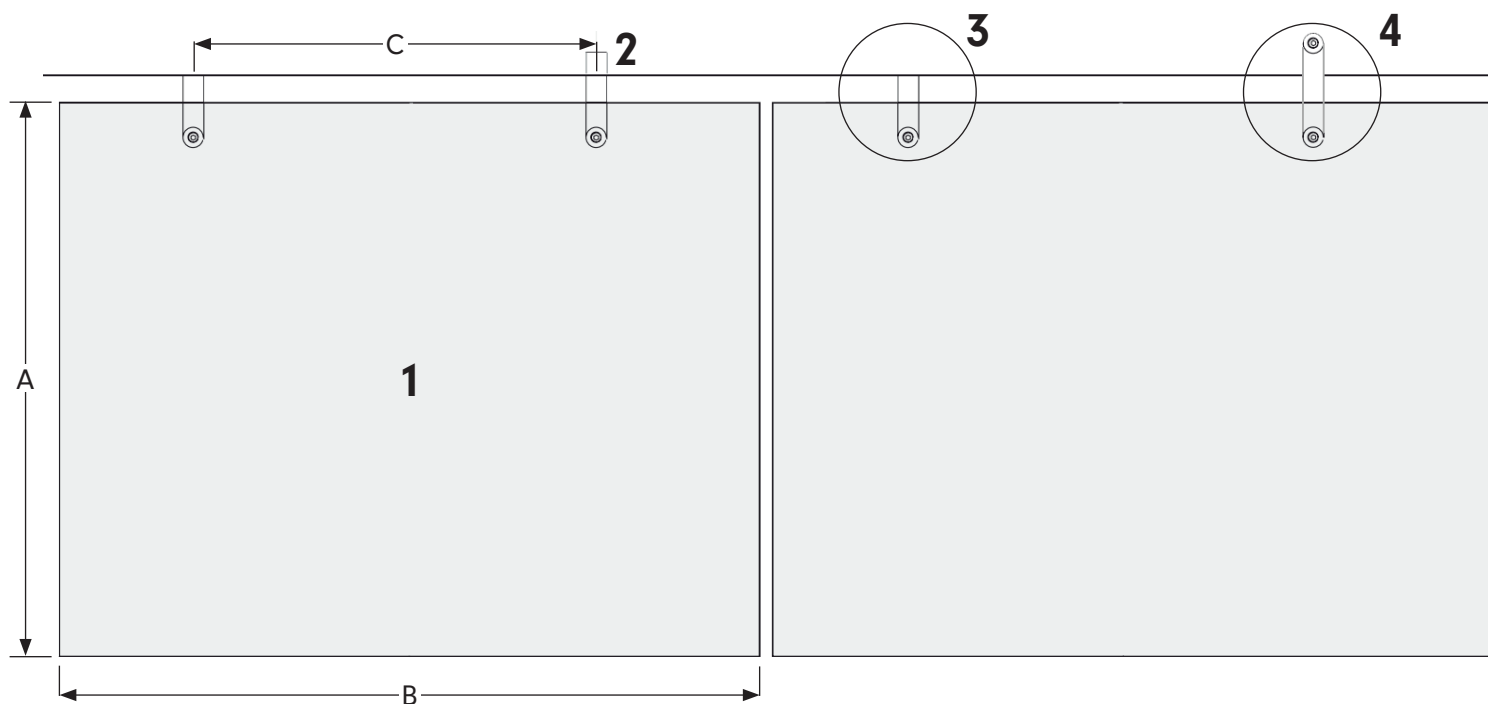


Height A: max. 1.100 mm  
 Width B: max. 1.500 mm  
 Mounting distance: 750 mm

- 1. Glass panel 6 mm
- 2. Fixings, stainless steel or galvanized steel


Smoke protection class: **DH30**

D ... smoke-tight  
 H ... hot smoke  
 30 ... time rating in minutes; the component limits smoke permeability for at least 30 minutes.

### 3. Mounting options: bracket angle

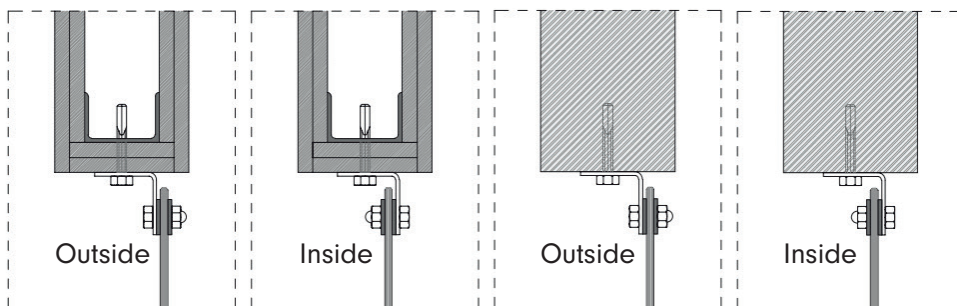

### 4. Mounting options: straight bracket

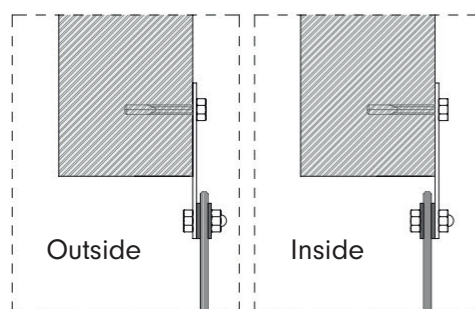

### Screw connection type

